


Angle-Thermocouple Type : WST-H 17

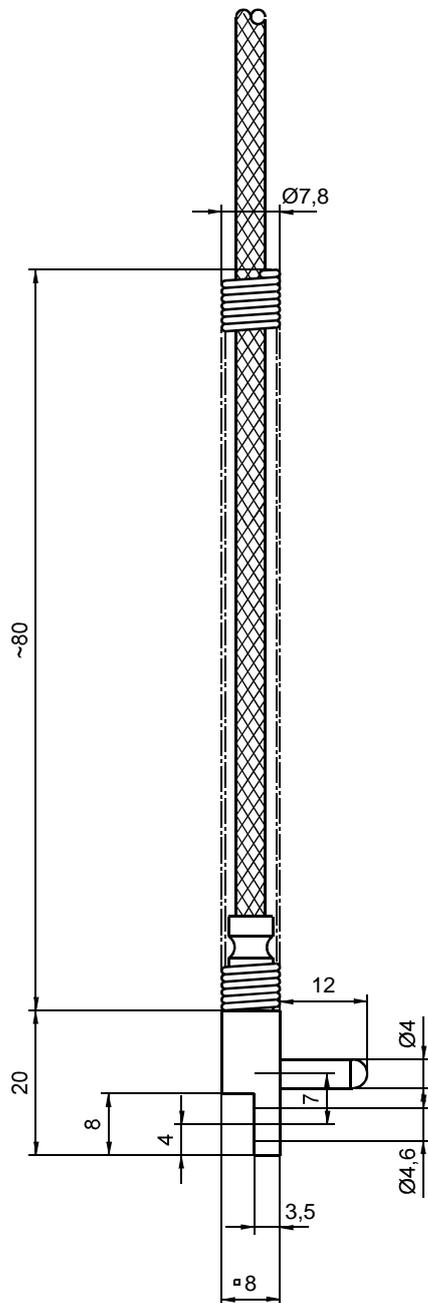

thermoelectric voltages : Fe-CuNi ½ DIN 43710 (L)
Fe-CuNi DIN EN 60584, Kl. 1 (J)
NiCr-Ni DIN EN 60584, Kl. 1 (K)

sensor tip : $\varnothing 4$ mm (VA)

installation depth : 12 mm (or to customer)

control point : soldered/ hemispherical

operation temperature : to max. 400°C

thermocouple wire : 2 x 0,35 mm²
fiber glass insulation
and specially impregnated
wire mesh from soft galvanized
iron wires

Other customer preferences are possible
Subject to modifications!

25/03