


Thermocouple
Type : T-NP 15

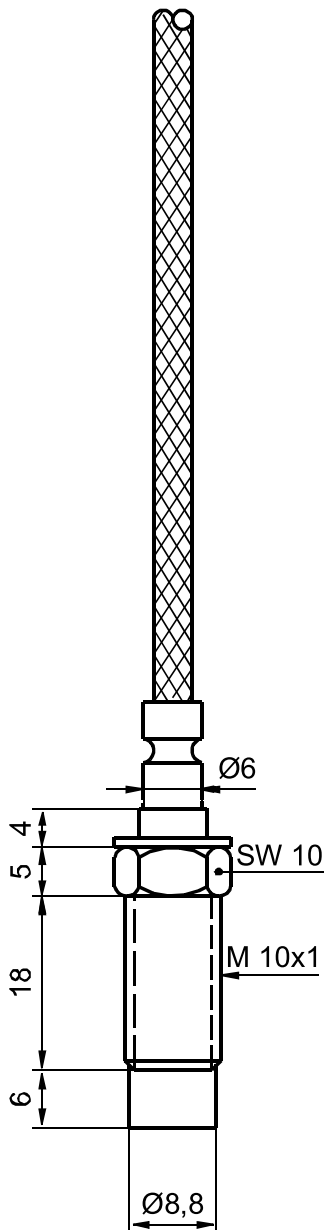

thermoelectric voltages : Fe-CuNi ½ DIN 43710 (L)
Fe-CuNi DIN EN 60584, Kl. 1 (J)
NiCr-Ni DIN EN 60584, Kl. 1 (K)

sensor tip : Ø 8,8 mm/ M 10 x 1 (VA)

installation depth : to ca. 24 mm incl. thread

nipple : Ms 58 nickel-plated

controll point : welded/ plane

operation temperature : to max. 400°C

thermocouple wire : 2 x 0,35 mm²
fiber glass insulation
and specially impregnated
wire mesh from soft galvanized
iron wires

Other customer preferences are possible
Subject to modifications!

30/06