


Thermocouple
Type : T-NP 35

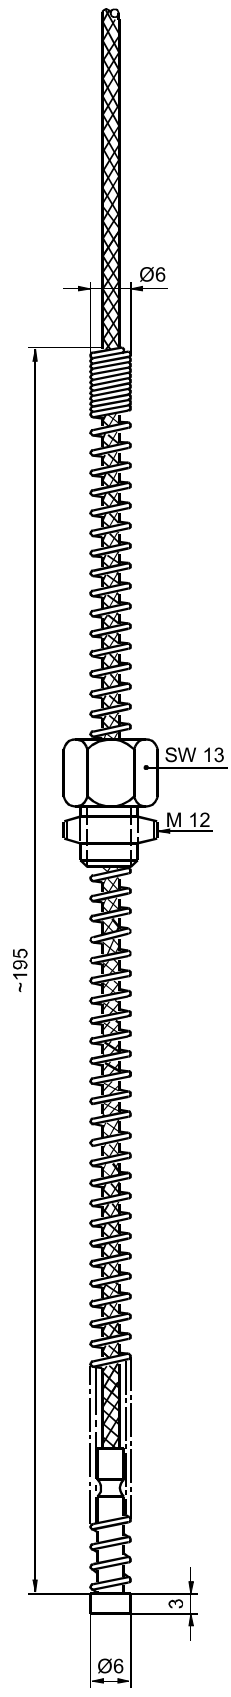

thermoelectric voltages : Fe-CuNi ½ DIN 43710 (L)
Fe-CuNi DIN EN 60584, Kl. 1 (J)
NiCr-Ni DIN EN 60584, Kl. 1 (K)

sensor tip : Ø 6 mm (Ms)

installation depth : ca. 10 to 180 mm
(or to customer)

compression spring : V2A

nipple : Ms 58 nickel-plated

control point : free of potential/ plane

operation temperature : to max. 400°C

thermocouple wire : 2 x 0,22 mm²
fiber glass insulation
and specially impregnated
wire mesh from soft galvanized
iron wires

Other customer preferences are possible
Subject to modifications!

11/14