


Surface-Thermocouple
Type : FT-23

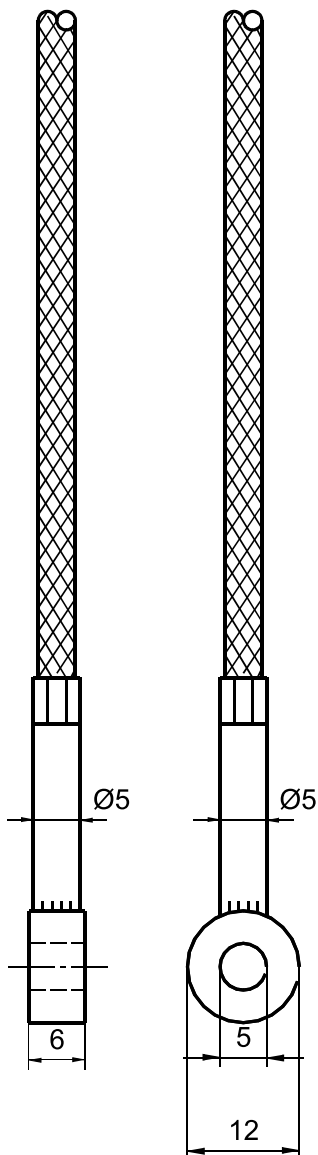

thermoelectric voltages : Fe-CuNi ½ DIN 43710 (L)
Fe-CuNi DIN EN 60584, Kl. 1 (J)
NiCr-Ni DIN EN 60584, Kl. 1 (K)

sensor tip : contact surface Ø 12 mm (Ms)

mounting hole hole : Ø 5 mm (or to customer)

controll point : soldered

operation temperature : to max. 400°C

thermocouple wire : 2 x 0,35 mm²
fiber glass insulation
and specially impregnated
wire mesh from soft galvanized iron
wires

Other customer preferences are possible
Subject to modifications!

25/03